


LDX-405: 4CH LED Dimmer Pack

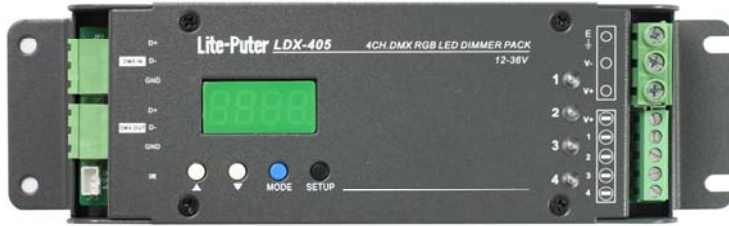

Features:

- Built-in 33 modes¹. 31 standalone modes, DMX mode, and intelligent mode².
- Can store scenes, adjust dimming level, adjust chaser speed, and recall 33 built-in modes by remote controller (optional IR-0501).
- Connectable to ECP control panel.
- Can store 7 scenes (SC1~6+OFF) and recall the scene by IR-0501 or ECP control panel.
- PWM: 4096 steps.

Specifications:

Power	DC 12-36V
Protocol	DMX-512/ RS-485 (EDX)
Capacity	4CH, 5A per channel, total: 20A
Signal Connector	3 PIN green terminal
Dimension	228(W)*60(H)*40(D)mm
Weight	300g

*1. Build-in mode list

No	Vision	Description
1	BLACK	Static state black
2	STATIC RED	Static state red
3	STATIC GREEN	Static state green
4	STATIC BLUE	Static state blue
5	STATIC YELLOW	Static state yellow
6	STATIC PURPLE	Static state purple
7	STATIC CYAN	Static state cyan
8	STATIC WHITE	Static state white
9	COLOR CHANGE	Seven-color skip change
10	SIXCOLOR CHANGE	Six-color skip change(exclude white)
11	RGB CHANGE	Three-color skip change
12	RG CHANGE	R+G skip change
13	RB CHANGE	R+B skip change

14	GB CHANGE	G+B skip change
15	WHITE CHANGE	White frequently twinkling
16	COLOR SMOOTH	Seven-color gradual change
17	RGB SMOOTH	Three-color gradual change
18	RG SMOOTH	R+G gradual change
19	RB SMOOTH	R+B gradual change
20	GB SMOOTH	G+B gradual change
21	COLOR GRADUAL	Seven-color gradual bright gradual dark
22	RGB GRANDUAL	Three-color gradual bright gradual dark
23	WHITE GRADUAL	White gradual bright gradual dark
24	RG GRADUAL	R+G gradual bright gradual dark
25	RB GRADUAL	R+B gradual bright gradual dark
26	GB GRADUAL	G+B gradual bright gradual dark
27	R GRADUAL	R gradual bright gradual dark
28	G GRADUAL	G gradual bright gradual dark
29	B GRADUAL	B gradual bright gradual dark
30	ADJUST MODE	RGB color adjust
31	AUTO PROGRAM	Auto
32	DMX512 MODE	DMX
33	INTELLIGENT MODE	Intelligent

*2. Intelligent mode:

Console channel	Descriptions
Channel 1	Control channel 1 of LDX-405
Channel 2	Control channel 2 of LDX-405
Channel 3	Control channel 3 of LDX-405
Channel 4	Control channel 4 of LDX-405
Channel 5	Recall build-in mode 1~30. (level of DMX channel <3%, recall mode 1; level of DMX channel between 3%~6%, recall mode 2; level of DMX channel between 6%~9%, recall mode 3....; level of DMX channel >87, recall mode 30.)
Channel 6	Control chaser speed
Channel 7	Master control

Lite-Puter LITE PUTER ENTERPRISE CO., LTD

9F. No. 196, Sec.3, Datung Road, Shijr City, Taipei, Taiwan

Website: www.liteputer.com.tw E-mail: sales@liteputer.com.tw

TEL: +886-2-8647-2828 ext.321, 322 FAX: +886-2-8647-2727